

SHARP

DUCTLESS BI-BLOCK
WALL UNIT



ECOLOGICALLY RESPONSIBLE
WITH UNRIVALED PERFORMANCE

DWU SERIES
12 000 BTU/H



Refrigerant R32 | Environmentally friendly



World's First Mini-Split with
Auto Filter Sweeping System

WWW.SHARPHVAC.CA

*Plasmacluster is a registered trademark
or trademark of SHARP Corporation.

Models Number	AY-XP12DWU AHRI : 218327264 ENERGY STAR : 4577213	
Air conditioning Capacity (Btu/h)	12 000	
Air conditioning Capacity Min - Max (Btu/h)	3 500 - 17 000	
Heating Capacity (Btu/h)	16 000	
Heating Capacity Min - Max (Btu/h)	3 100 - 22 000	
Maximum heating @ -8.3 °C (17 °F) (Btu/h) (COP)	19 000 (2.0)	
Maximum heating @ -15 °C (5 °F) (Btu/h) (COP)	15 500 (1.9)	
Maximum heating @ -20 °C (-4 °F) (Btu/h) (COP)	12 800 (1.66)	
Maximum heating @ -25 °C (-13 °F) (Btu/h) (COP)	10 300 (1.54)	
Maximum heating @ -30 °C (-22 °F) (Btu/h) (COP)	9 200 (1.42)	
EER ²	14.0	
SEER ²	24.0	
HSPF ² (IV) 10.5 / HSPF ² (V)	11.0 / 8.5	
V, Hz, Phase	208-230/60/1	
Maximum Fuse Size (A)	25	
Dehumidification Pt/h	1.9	
Air conditioning: Sound level (dB)	44 / 42 / 34 / 27 / 23	
Air conditioning: Sound level (dB unite ext.)	49	
Heating: Sound level (dB)	44 / 42 / 36 / 29 / 23	
Heating: Sound level (dB unite ext.)	50	
Air cond.: Air flow (ft ³ /min Sh/H/M/B/Sb)	487 / 438 / 318 / 219 / 194	
Heating: Air flow (ft ³ /min Sh/H/M/B/Sb)	487 / 438 / 343 / 268 / 194	
Operating range of exterior temperature: Air cond.	14 to 115°F (-10 to 46°C)	
Operating range of exterior temperature: Heating	-22 to 75°F (-30 to 24°C)	
Pipe Diameter (Liq x Gas) (in.)	1/4 x 3/8	
Refrigerant	R32	
Combined Max. length ft. (m)	66 (20) (pre-charged: 25')	
Max. height ft. (m)	33 (10)	
Pipe Diameter in.	Gas 3/8	Liquid 1/4
Total weight lb (kg)	27 (12)	95 (43)
Dimensions: Width in.	31-13/32	33-15/32
Dimensions: Height in.	9-13/16	27-15/16
Dimensions: Depth in.	11-27/32	13
SHARP AY-XP12DWU INDOOR AE-X12DWU OUTDOOR		



Technologie Plasmacluster

Plasmacluster Key Benefits

- Suppresses the activity of airborne viruses
- Suppresses the activity of airborne microbes
- Acts on both airborne and adhering mold
- Inactivates and removes airborne allergens like dust mite feces and dead dust mites
- Inactivates and removes adhering odours (like tobacco smoke)
- Removes static electricity which attracts airborne particles
- Plasmacluster is effective all year round

Plasmacluster's Microbe-Removing Mechanisms


1 Ions are released.

Plasmacluster Ions, the same positive and negative ions found in nature, are generated by plasma discharge and released into the air.

The ions are long-lasting*3 because they are surrounded by water molecules.




Plasmacluster Ion Device




2 The ions act on airborne microbes.

The ions form hydroxide (OH) radicals that are highly oxidizing only when they adhere to the surfaces of mold and viruses. They instantly remove the hydrogen from the surface proteins, breaking them down.



3 The broken-down components return to the air as water.

The hydroxide (OH) radicals combine with hydrogen (H) to form water (H2O), which returns to the air.



Integrated SHARP Wi-Fi on all your units for greater control and convenience.



COANDA EFFECT UP TO 50 FEET
NEVER HAVE AIR DIRECTLY ON YOU AGAIN



« HOT GAS PIPE »
Unique to SHARP




Mini-Split with Auto Filter Sweeping System



Long Lasting Clean Filter

With Auto Filter Sweeping System, the filter stays clean for a long time*

* The Dust Boxes store dust accumulated over 10,000 hours of use (Tested in Japan, conditions apply).

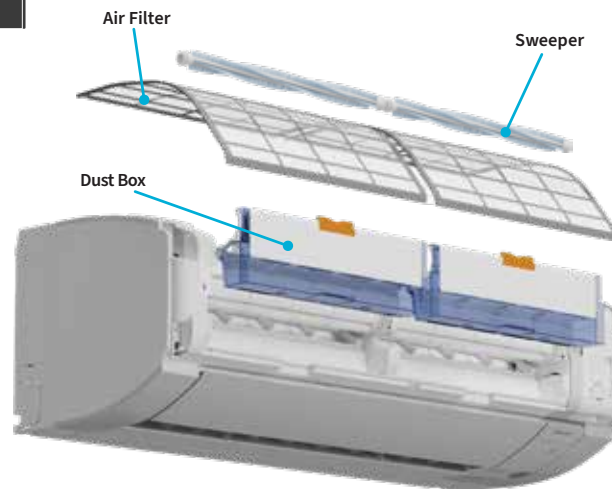

SHARP

• Plasmacluster cannot create a completely sterile environment, or ensure prevention of infection. • The actual number of ions and effectiveness of microbe removing*1 and purifying*2 depend on the room conditions and the operation methods, including room size or shape, whether air conditioning or ventilation is used, product placement, direction of ion discharge, and operation mode. *1 Airborne viruses are suspended in a 1m3 box, and the percentages of the viruses removed after 10 minutes are measured. Suspended microbes subjected to Plasmacluster air purification are measured after 38 minutes in a testing room of about 40 m3. Test results may differ results in actual room conditions. *2 The effectiveness depends on the surrounding conditions (e.g., temperature, humidity and airflow), usage time and method. *3 Verified in SHARP test comparisons of ions not surrounded by water molecules.

AUTHORIZED DEALER